



Thermo Scientific  
S1 Pipet Filler



# redefining pipetting productivity

Fast Pipetting Performance • Longer Battery Life



**BIOGENERICA S.R.L.**

Via Pescara 7 Int. 23 - 95030 Mascali (CT) - Italia  
Tel. +39 095914678 - Fax +39 0952246205 - info@biogenerica.it  
[www.biogenerica.it](http://www.biogenerica.it)


**Thermo**  
SCIENTIFIC

# Thermo Scientific S1 Pipet Filler

Your time is valuable and faster performance is essential. Trust the Thermo Scientific S1 Pipet Filler to deliver everything you need to stay productive in the lab:

## Faster Performance • Advanced Speed Controls • Longer Battery Life

The portable lightweight S1 Pipet Filler is designed for use with either glass or plastic serological pipets. It offers effective streamlined pipetting performance with maximum pipetting comfort.

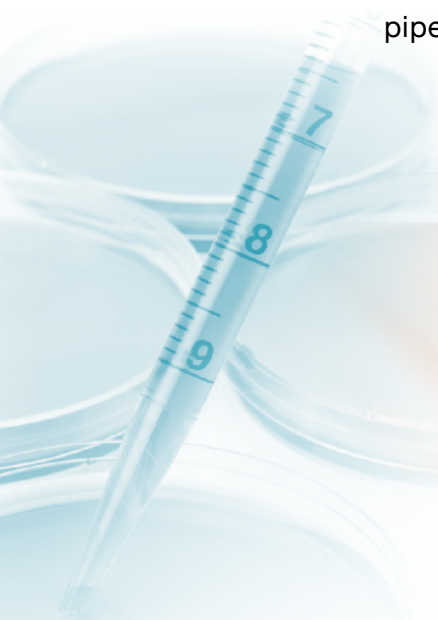

### Monitor Performance.


The backlit LCD display screen shows remaining battery life and alarms with a blinking light when the battery charge gets low, minimizing the risk of a slowing pipette in the middle of a procedure. Current speed settings are indicated on the display for convenience.



LCD Battery Display

### Control Speed.

Separate aspirate and dispense buttons on the rear of the S1 pipet filler individually set aspiration (upper button) and dispense (lower button) speeds. Choose from eight speeds with a simple "+" or "-" to adjust pipetting speed which is displayed on the LCD. A zero speed selection on dispense enables gravity dispensing and extra slow aspiration speeds prevent overpipetting when using 1 ml pipets.



Speed Controls

### Ready when you need it.

Sustain lightweight, cordless pipetting with the Thermo Scientific S1 Pipet Filler featuring a heavy-duty lithium-ion battery. Operation lasts three times longer between charges than typical units using nickel-metal hydride batteries — so your S1 pipet filler is ready when you need it. The powerful motor ensures fast and efficient pipetting. A 50 ml pipet is filled in less than 6 seconds!

### Your choice of colors.


Available in your choice of five colors, the S1 pipet filler is a fun addition to the lab. With a customizable ID area the pipet filler permits easy recognition of ownership and/or task designation.




**BIOGENERICA S.R.L.**  
Via Pescara 7 Int. 23 - 95030 Mascali (CT) - Italia  
Tel. +39 095914678 - Fax +39 0952246205 - info@biogenerica.it  
www.biogenerica.it

# redefining pipetting productivity

Pipet Filler Run Time (Hr)

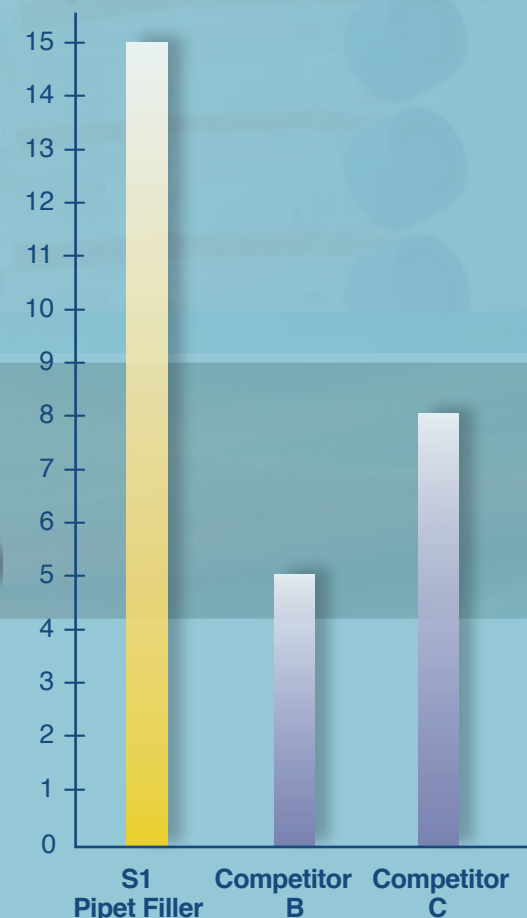

Pipet Filler Recharge Time (Hr)

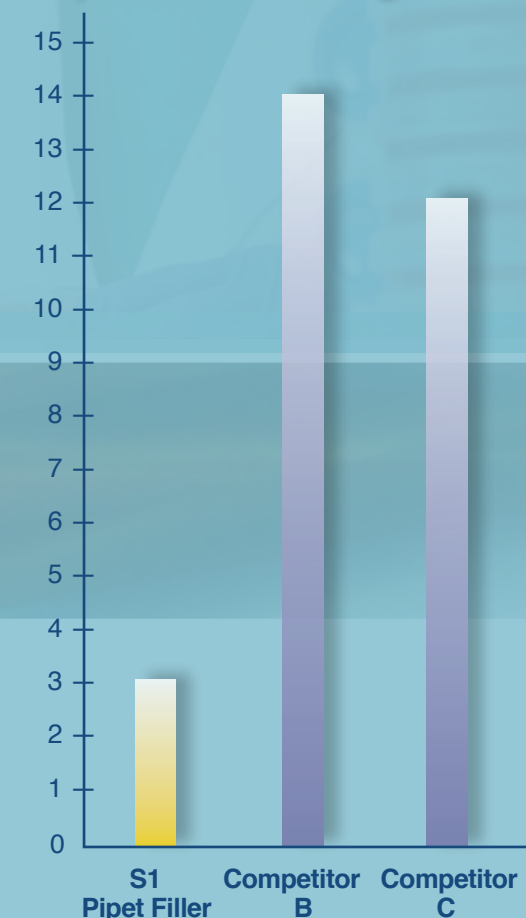

The S1 Pipet Filler can be used twice as long as other pipet fillers with NiMH batteries, while taking half the time to recharge.

### The S1 Pipet Filler is ideal for a wide range of application needs including:

Cell Culture  
Bioproduction  
Food Safety  
Blood Separation

Biotechnology  
Stem Cell  
Microbiology  
Molecular Biology



**BIOGENERICA S.R.L.**  
Via Pescara 7 Int. 23 - 95030 Mascali (CT) - Italia  
Tel. +39 095914678 - Fax +39 0952246205 - info@biogenerica.it  
www.biogenerica.it



# Thermo Scientific S1 Pipet Filler

## Ordering Guide

Item No.	Description	Qty
9501	S1 Pipet Filler, White	1 each
9511	S1 Pipet Filler, Clear	1 each
9521	S1 Pipet Filler, Blue	1 each
9531	S1 Pipet Filler, Red	1 each
9541	S1 Pipet Filler, Green	1 each

## Accessories

Item No.	Description	Qty
9066	Single Pipet Filler Wall Mount Stand*	1
9067	Single Pipet Filler Table Mount Stand*	1
9068	Power Supply (Universal Input)*	1
9070	1 ml Pipet Filler Support*	1
9069	Single Pipet Filler Wing Stand**	1
9065	Silicone Pipet Gripper	4/case
9057	Hydrophobic Filters, 0.45 µm, Sterile	25/box
4580560	Hydrophobic filters, 0.45 µm, Non-Sterile	5/bag
9064	Nosepiece (holder, silicone gripper, filter)	1

\*Included with your S1 Pipet Filler purchase.

\*\*Not available for use or sale within the United States or for importation into the United States.



Single Pipet Filler  
Wall-mounted Holder



Single Pipet Filler  
Wing Stand\*\*

## Specifications

### Performance Characteristics

Aspirate Speeds	8
Dispense Speeds	8 (+ Gravity Dispense)
Battery	Lithium-Ion
Runtime between Charges	15 Hours of Continuous Use
Recharge Time	3 hours
Fill Time for 50 ml pipet	5.5 seconds

### Environmental Operating Conditions ▲

Operating Altitude	0-1,524 m
Operating Temperature	10-35 °C
Relative Humidity	10-95 % non-condensing
Mains Supply	90 V AC or 264 V AC
Voltage Fluctuations (for external Power supply)	
Transient Overvoltage (for the power supply)	Installation Category II
Applicable Rated Pollution Degree	Pollution Degree 2 (normally only non-conductive pollution occurs)

▲ For optimal performance of pipet filler

### Physical Characteristics

Weight	220 g
Nosecone Pipet Holder	Autoclavable silicone rubber
Pipet Compatibility	All major brands of glass or plastic Serological pipets, 1 ml – 100 ml

### Power Requirements

Power Supply Input	100-240 V AC 60-50 Hz, 0.2 A
Power Supply Output	6.0 V DC, 0.5 A, Constant Current



Visit [www.thermoscientific.com/s1pipetfiller](http://www.thermoscientific.com/s1pipetfiller) for more information

Thermo Scientific  
Nunc Serological Pipets  
are accurate, disposable  
plastic pipets calibrated  
to deliver to the tip.

Sterilized and plugged for convenience, these pipets are an excellent choice for cell culture applications and have a certified Sterility Assurance Level (SAL) of 10<sup>-6</sup>.

Item No.	Capacity	Grad.	Neg. Grad.	Tolerance	Qty./Bag
159609	1	0.01	0.3	±0.02	200
159617	2	0.01	0.3	±0.04	125
159625	5	0.1	2	±0.10	50
159633	10	0.1	3	±0.20	50
159641	25	0.2	10	±0.50	50
159668	50	0.5	10	±0.75	25

**BioGenerica**  
Your Partner for Life Science and Research Products

**BIOGENERICA S.R.L.**  
Via Pescara 7 Int. 23 - 95030 Mascali (CT) - Italia  
Tel. +39 095914678 - Fax +39 0952246205 - info@biogenerica.it  
[www.biogenerica.it](http://www.biogenerica.it)

© 2011 Thermo Fisher Scientific Inc. All rights reserved. All trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries.

Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local representative for details.

North America: +1 800 522 7763

Europe: Austria +43 1 801 40 0, Belgium +32 2 482 30 30, Finland/Nordic +358 9 329 100, France +33 2 28 03 20 00,

Germany: National Toll Free 08001-536 376, International +49 6184 90 6940, Italy +39 02 95059 1, Netherlands +31 76 571 4440,

Russia/CIS +7 (812) 703 42 15, Spain/Portugal +34 93 223 3154, Switzerland +41 44 454 12 12, UK/Ireland +44 870 609 9203

Asia: Australia +61 3 9757 4300, New Zealand +64 9 980 6700, India +91 22 5542 9494, Japan +81 45 453 9220, China +86 21 6865 4588

or +86 10 5850 3588, Other Asian countries +852 2885 4613

Countries not listed: +49 6184 90 6940 or +33 2 28 03 20 00

[www.thermoscientific.com](http://www.thermoscientific.com)

**Thermo**  
SCIENTIFIC

Part of Thermo Fisher Scientific